


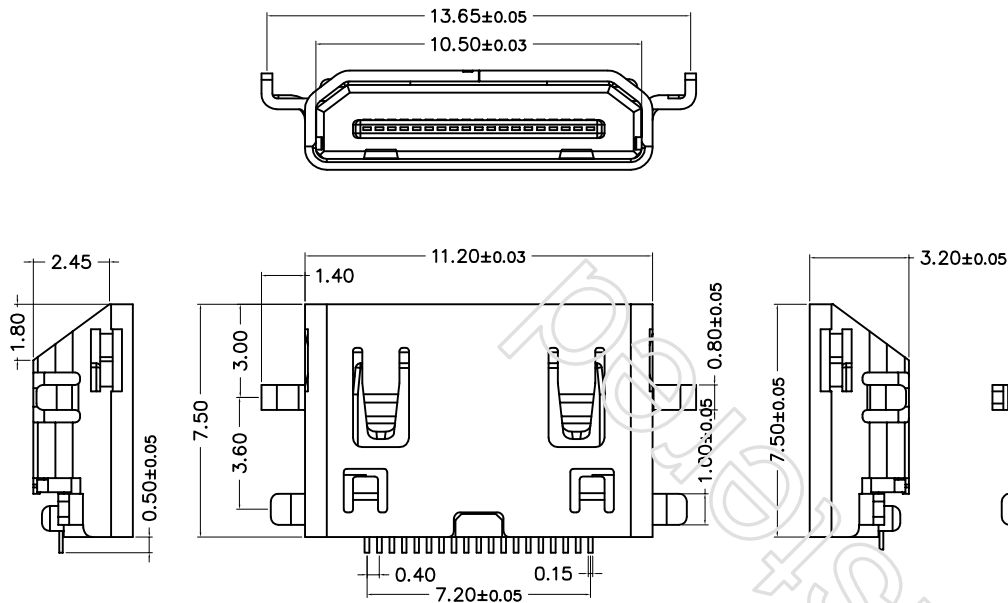
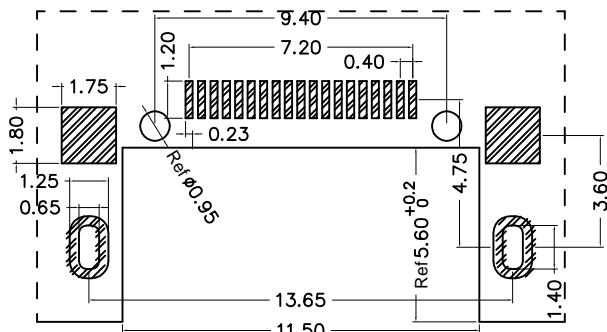


* 所有原料材质, 生产制程, 电镀必须符合ROHS要求

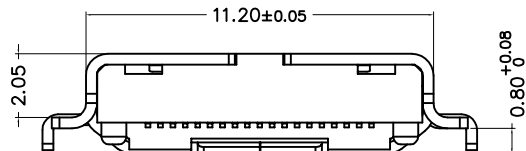

3D VIEW

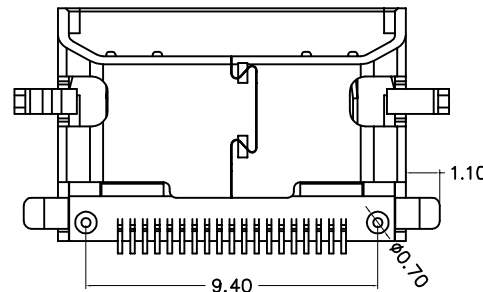

- SPECIFICATION:
- 1.MATING FORCE:44.1N MAX
 - 2.UNMATING FORCE:7-25N
 - 3.DURABILITY: 5000 CYCLES MIN
 - 4.CURRENT:0.5A
 - 5.VOLTAGE:40V MAX
 - 6.WITHSTANDING VOLTAGE:500V AC MIN.(UNMATED)
 - 7.CONTACT RESISTANCE:30MN MAX.
 - 8.INSULATION RESISTANCE:100MN /MIN.(UNMATED)
 - 9.OPERATING TEMPERATURE RANGE:-20.C TO +85.C
 - 10.ALL THE MATERIAL SHOULD COMPLY WITH THE ROHS REQUIREMENT.

| Type C pin | Signal Name |
|------------|-------------------|
| 1 | TMDS Data2_Shield |
| 2 | TMDS Data2+ |
| 3 | TMDS Data2- |
| 4 | TMDS Data1_Shield |
| 5 | TMDS Data1+ |
| 6 | TMDS Data1- |
| 7 | TMDS Data0_Shield |
| 8 | TMDS Data0+ |
| 9 | TMDS Data0- |
| 10 | TMDS Clock_Shield |
| 11 | TMDS Clock+ |
| 12 | TMDS Clock- |
| 13 | DDC/CEC Ground |
| 14 | CEC |
| 15 | SCL |
| 16 | SDA |
| 17 | Utility |
| 18 | +5V Power |
| 19 | Hot Plug Detect |



深圳市鑫南天科技有限公司
Shen zhen Shi Xin Nan Tian Industrial Co., Ltd

| | | | |
|---|--|-------------------------------|---------------------|
| DIMENSIONS INIT: mm UNLESS OTHERWISE SPECIFIABLE | PRODUCT NAME : MINI-HDMI 19Pin CTYPE沉板0.80斜口 (鑫南天版本3) | DRAWING: COCO | DATE: 2009/12/10 |
| | DIMENSION TOLERANCE X.X: ± 0.25 X.XX: ± 0.10 X.XXX: ± 0.05 ANGULAR: ± 1° | PRODUCT NO. : 0101DAAG19Q8 | CHECK: JANY |
| | DRAWING NO. : XNT-009 | APPROVED: JEFF | DATE: 2009/12/10 |
| | SCALE: 1:1 | DWG ID: P D | REV.: A |
| | | | PAGE: 10F 1 |

| REVISION NO. | ECR NO. | DESCRIPTION | MARK | DATE |
|--------------|---------|-------------|------|------|
| 1 | | | | |
| 2 | | | | |