




* ROHS Compliant

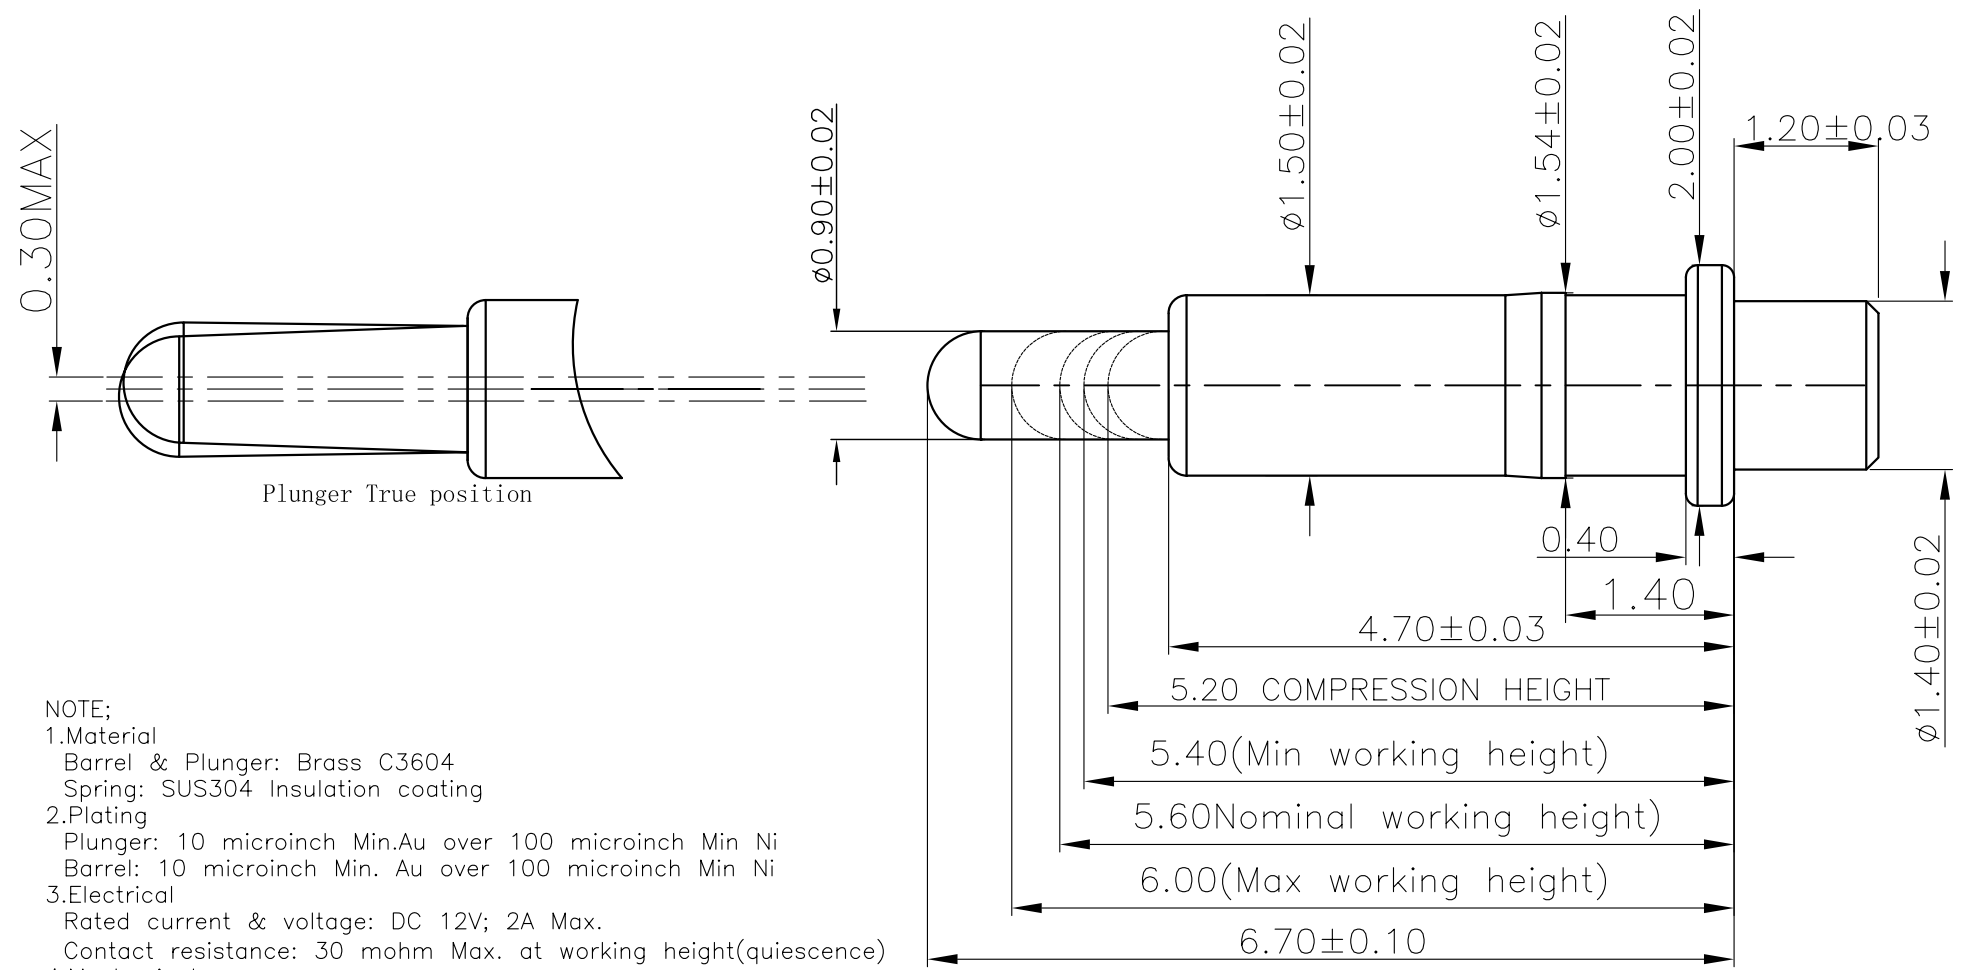

NOTE;

- Material
Barrel & Plunger: Brass C3604
Spring: SUS304 Insulation coating
- Plating
Plunger: 10 microinch Min.Au over 100 microinch Min Ni
Barrel: 10 microinch Min. Au over 100 microinch Min Ni
- Electrical
Rated current & voltage: DC 12V; 2A Max.
Contact resistance: 30 mohm Max. at working height(quiescence)
- Mechanical
Spring force: 80g±20g Max at working height(quiescence).
Durability: 10,000 cycles(minimum)
- To ensure the best usage, please operate it based on the working height.
- RoHS and HF compliant.

		深圳市鑫南天科技有限公司 Shen Zhen Xin Nan Tian Technology Co., Ltd	
		DIMENSIONS INIT: mm UNLESS OTHERWISE SPECIFIABLE	PRODUCT NAME : POGO pin 2.00mm*7.90mm
DIMENSION TOLERANCE X.X: ± 0.25 X.XX: ± 0.20 X.XXX: ± 0.10 ANGULAR: ± 1°	PRODUCT NO. : XNT-POGO-111140	CHECK: JANY	DATE: 2014/04/26
	DRAWING NO. : XNT-1013	APPROVED: JEFF	DATE: 2014/04/26
		SCALE: 1:1	DWG ID: P D REV.: A PAGE: 1 of 1

REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE
1				
2				
3				