



\* 所有原料材质, 生产制程, 电镀必须符合ROHS要求

技术参数:  
 间距: 2.0MM  
 极数: 2--12  
 适用基板厚度: 1.6MM  
 额定电流: 5A, AC, DC  
 额定电压: 250V, AC, DC  
 工作温度: -25度至+85度  
 耐压值: 1500V, AC/min  
 接触电阻: 小于等于0.01Ω  
 绝缘电阻: 大于等于1000MΩ  
 材料:  
 底座: 尼龙 66UL94V-0  
 插针: 黄铜 表面镀纯锡

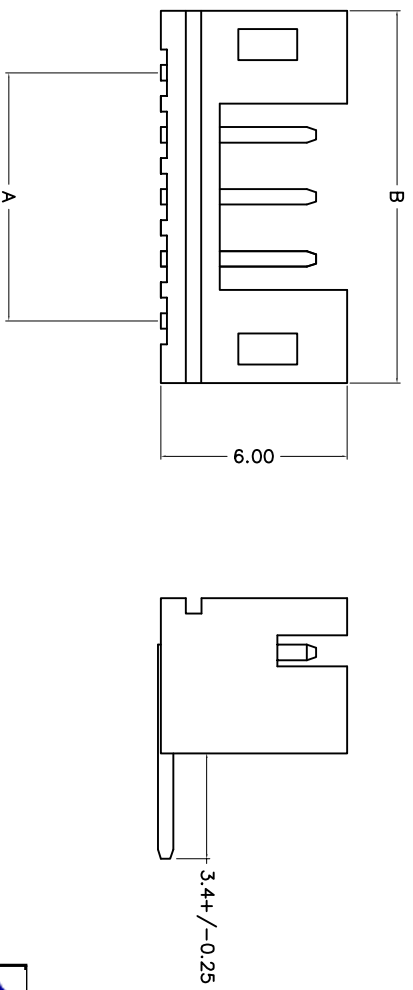

极数	直针编码	弯针编码	尺寸	
			A	B
2	PH-2A	PH-2AW	2.0	6
3	PH-3A	PH-3AW	4	8
4	PH-4A	PH-4AW	6	10
5	PH-5A	PH-5AW	8	12
6	PH-6A	PH-6AW	10	14
7	PH-7A	PH-7AW	12	16
8	PH-8A	PH-8AW	14	18
9	PH-9A	PH-9AW	16	20
10	PH-10A	PH-10AW	18	22
11	PH-11A	PH-11AW	20	24
12	PH-12A	PH-12AW	22	26

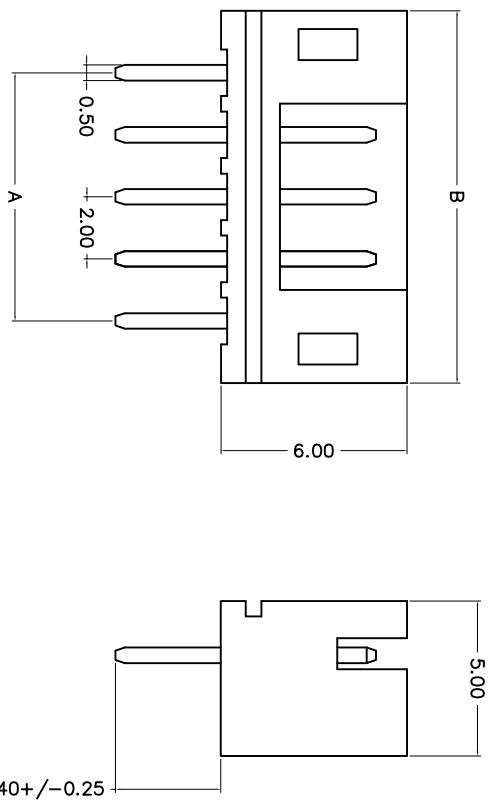

深圳市鑫南天科技有限公司  
 Shen zhen Shi Xin Nan Tian Industrial Co., Ltd

DIMENSIONS UNIT: mm		DRAWINGS:	
UNLESS OTHERWISE SPECIFIABLE		COCO	
DIMENSION	TOLERANCE	CHECK:	DATE:
X.X: ±	0.3	JANY	2008/12/10
X.XX: ±	0.25	APPROVED:	DATE:
X.XXX: ±	0.15	JEFF	2008/12/10
ANGULAR: ±	1°	SCALE:	1:1
PRODUCT NAME: PH-2.0 条形连接器		DWG ID:	P D B
PRODUCT NO.:		REV.:	B
DRAWING NO.:		PAGE:	1 of 1

REVISION NO.	EGR NO.	DESCRIPTION	MARK	DATE
1				
2				