
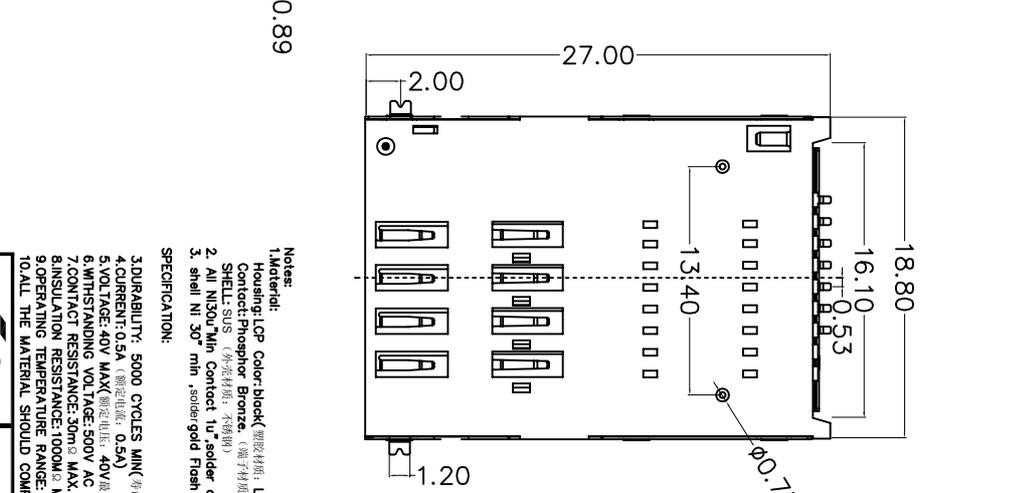
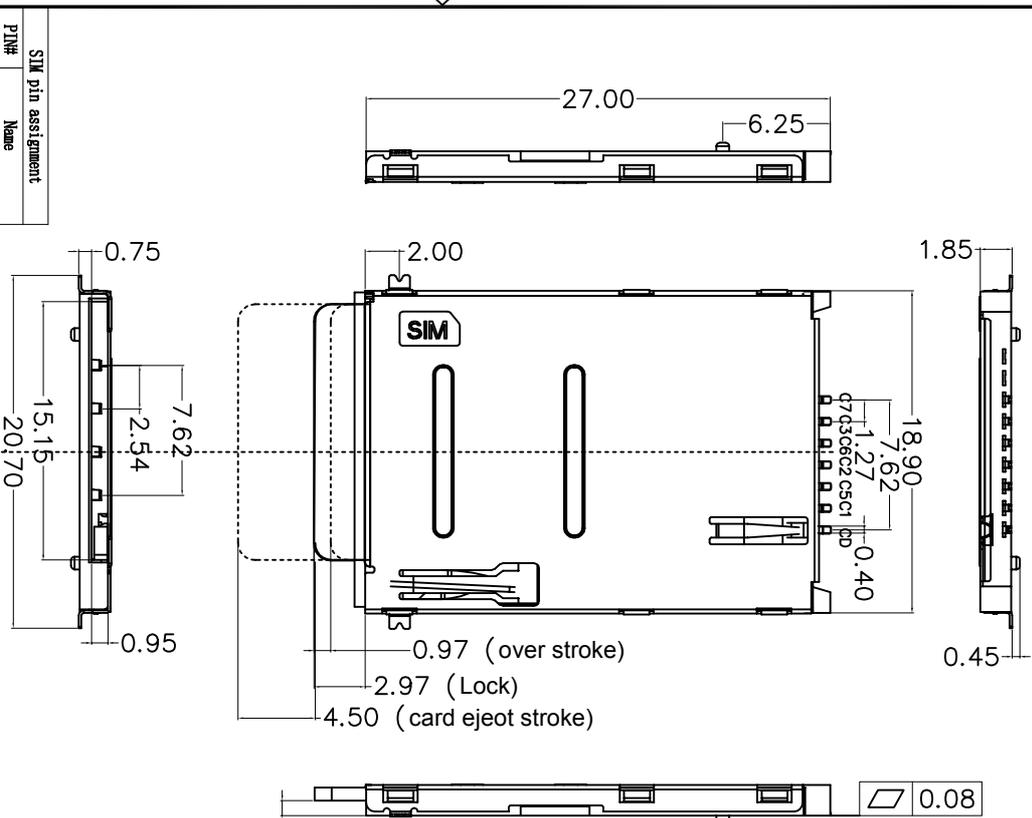


* 所有原材料质，生产制程，电镀必须符合ROHS要求


RECOMMENDED PCB LAYOUT

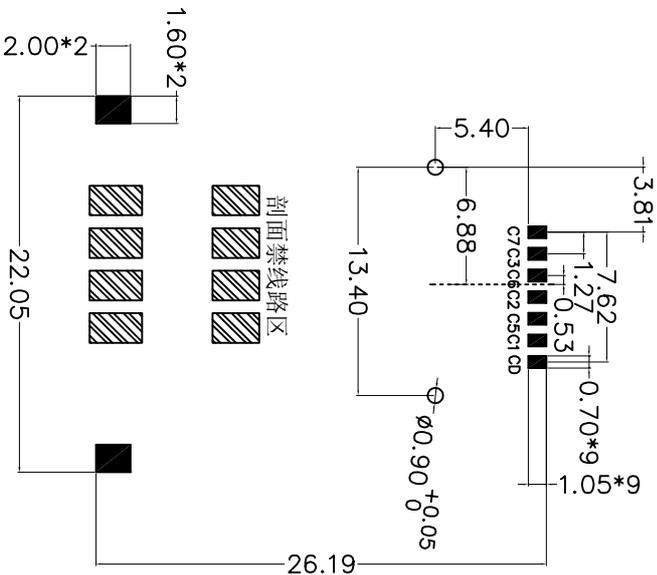

- Notes:
- 1.Material: Housing: LCP Color:black(塑胶材料), LCP 94-V0 黑色) Contact: Phosphor Bronze. (端子材料: 磷青铜) SHELL: SUS (外壳材料: 不锈钢) 2. All NISO. Min Contact 1u" solder area gold Flash (全部镀成30u", 接触点1u", 焊接成0.8u") 3. shell NI 30" min. solder gold Flash (镀层30u", 焊接成0.8u")
- SPECIFICATION:
- 3.DURABILITY: 5000 CYCLES MIN(寿命 5000 次最小)
 - 4.CURRENT: 0.5A (额定电流: 0.5A)
 - 5.VOLTAGE: 40V MAX(额定电压: 40V 最大)
 - 6.WITHSTANDING VOLTAGE: 500V AC MIN.(UNMATED) (耐电压: 500V AC 最小)
 - 7.CONTACT RESISTANCE: 30mΩ MAX. (端子接触电阻: 30mΩ 最大)
 - 8.INSULATION RESISTANCE: 1000MΩ MIN.(UNMATED) (绝缘阻抗: 1000 兆欧最小)
 - 9.OPERATING TEMPERATURE RANGE: -40.C TO +85.C (工作温度: -40 度到+85 度)
 - 10.ALL THE MATERIAL SHOULD COMPLY WITH THE ROHS (全部材料符合ROHS)

SIM pin assignment

Pin#	Name
C1	VCC 电压
C2	RST 重置
C3	CLK 时钟
C4	Reserved 备用
C5	GND 接地
C6	VPP 电压
C7	I/O 输入输出
C8	Reserved 备用

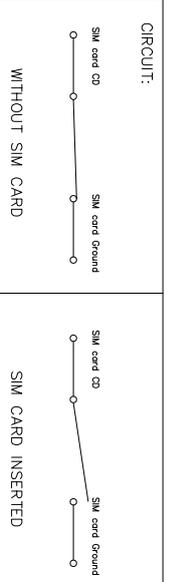

深圳市鑫南天科技有限公司
 Shen zhen Shi Xin Nan Tian Industrial Co., Ltd

DIMENSIONS INT: mm		UNLESS OTHERWISE SPECIFIABLE	
DIMENSION	TOLERANCE	DRAWING NO.:	APPROVED:
X.X: ±	0.25	XNT-029	JEFF
X.XX: ±	0.15		
X.XXX: ±	0.10		
ANGULAR: ±	1°		

PRODUCT NAME:	SIM PUSH 6P+1P有柱右开式翻盖	DATE:	2018/11/10
PRODUCT NO.:	XNT-0291BAAS07A	CHECK:	JANY
DRAWING NO.:	XNT-029	DATE:	2018/11/10
SCALE:	1:1	DWG ID:	REV: A
PAGE:	1 of 1		

REVISION NO.	1	ECR NO.	XNT-GC-0012	DESCRIPTION	盖板固定位置优化, 不影响产品	MARK	COCO	DATE	2018-08-20
--------------	---	---------	-------------	-------------	-----------------	------	------	------	------------