

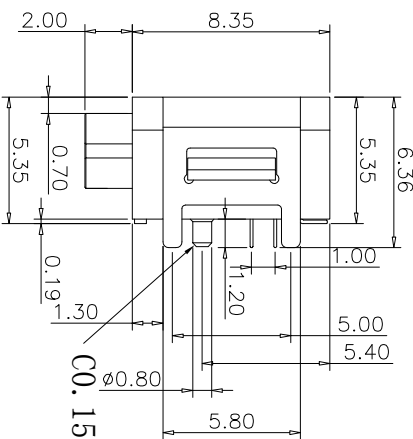
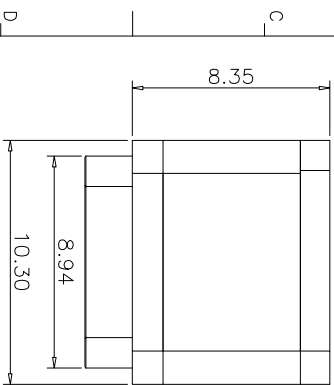
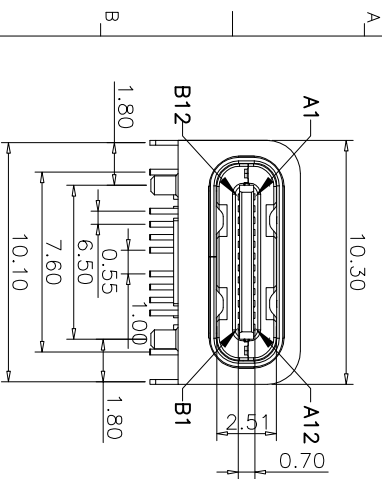


加防水圈示意图

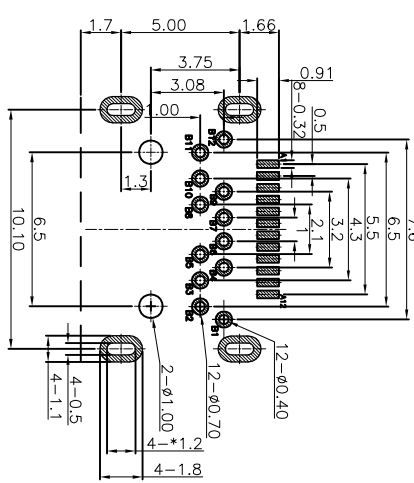

RECOMMENDED PCB LAYOUT
Tolerance: ±0.05mm

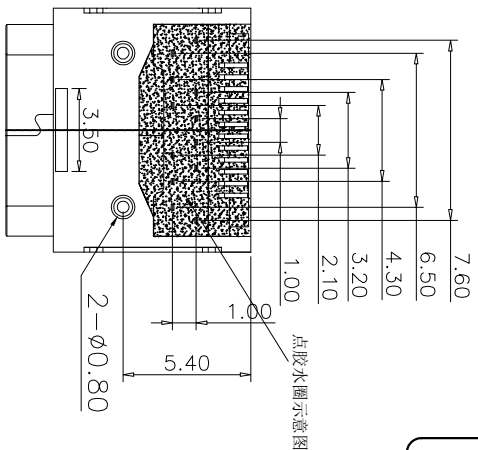


- NOTE:
- 1. MECHANICAL PERFORMANCE:
 - 1-1 INSERTION FORCE: 0.5~2.0kgf.
 - 1-2 REMOVAL FORCE: 0.8kgf~2.0kgf.
 - 1-3 DURABILITY: 10000 CYCLES.
 - 2. ELECTRICAL PERFORMANCE:
 - 2-1. CURRENT RATING: 3.0A VOLTAGE RATING: 5.0V
 - 2-2. LCR: VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX. SHIELD: 50mΩ/MAX. LCR MAX. CHANGE OF ALL PINS: 10mΩ.
 - 2-3 INSULATION RESISTANCE: 100MΩ MIN
 - 2-4 DIELECTRIC WITHSTAND VOLTAGE: AC 100V FOR 1 MINUTE.
 - 3. ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25°C~+85°C.
 - 4. R. REFLOW:
 - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

Pin	Signal Name	Mating Sequence	Pin	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2	SSTXp1	Second	B11	SSRXp1	Second
A3	SSTXn1	Second	B10	SSRXn1	Second
A4	Vbus	First	B9	Vbus	First
A5	CC1	Second	B8	SB12	Second
A6	Dp1	Second	B7	Dn2	Second
A7	Dn1	Second	B6	Dp2	Second
A8	SB11	Second	B5	CC2	Second
A9	Vbus	First	B4	Vbus	First
A10	SSRXn2	Second	B3	SSTXn2	Second
A11	SSRXp2	Second	B2	SSTXp2	Second
A12	GND	First	B1	GND	First
SHELL			SHELL		

NO	DESCRIPTION	QTY	MATERIAL	REMARKS
----	-------------	-----	----------	---------

1	Rear high	1PCS	PA10T	BLACK
2	SHELL HOUSING	1PCS	PA10T	BLACK
3	CONTACT	1SET	C7025	接触, SMT 1u"
4	Bracket	1PCS	STAINLESS STEEL	镀镍 30u"
5	SHELL	1PCS	STAINLESS STEEL	镀镍 30u"
6	Middle clip	1PCS	STAINLESS STEEL	Cleaning
7	Run-RING	1PCS	Silica gel	BLACK

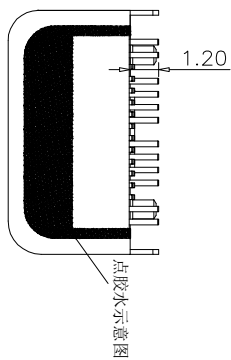

X: ±0.50	X* ± 2°	UNITS	TITLE: TYPE-C 24PIN板上前插后防水母座 IPX7级
.X ±0.30	.X* ± 1°	mm	
.XX ±0.10	.XX* ± 0.5°	MAT'L	
.XXX ± 0.05			
FINISH		APPD: JEFF	PRODUCT NO.: XNT-TYPE-C24P-HS07
CHKD: AG		DR: CDCD	
Q'TY			

