





RoHS
Compliant



带防水圈3D

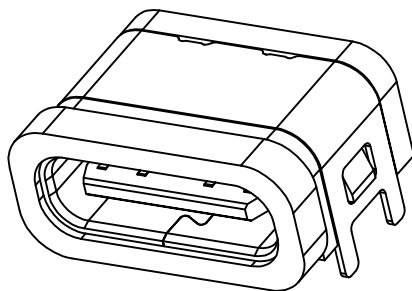




REV.	ZONE	DESCRIPTION	DESIGN	DATE
B		NEW		

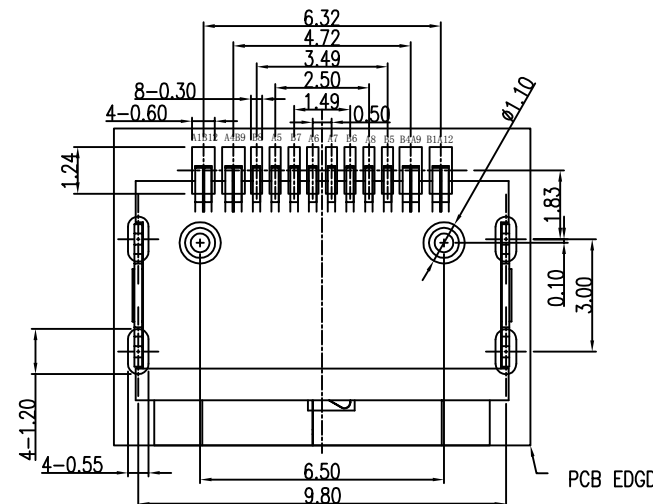

PCB LAYOUT
TOLERANCESIZE:±0.05

NOTES:

- MECHANICAL:MATING FORCE: 5-20N .
UNMATING FORCE: 8-20N .
DURABILITY: 10000 CYCLES MIN.
- ELECTRICAL:
CURRENT: 5.0A MAX
VOLTAGE: 20V MAX
WITHSTANDING VOLTAGE: 100V AC
CONTACT RESISTANCE: 40 mΩ MAX INITIAL;
50 mΩ MAX AFTER 10000 CYCLES
- ENVIRONMENTAL:
OPERATING TEMPERATURE RANGE -30° C ~ +80° C
- Salt Spray:24H

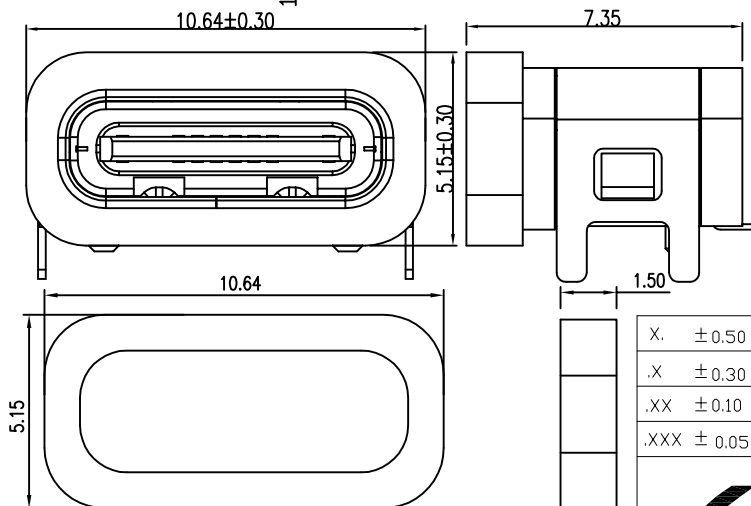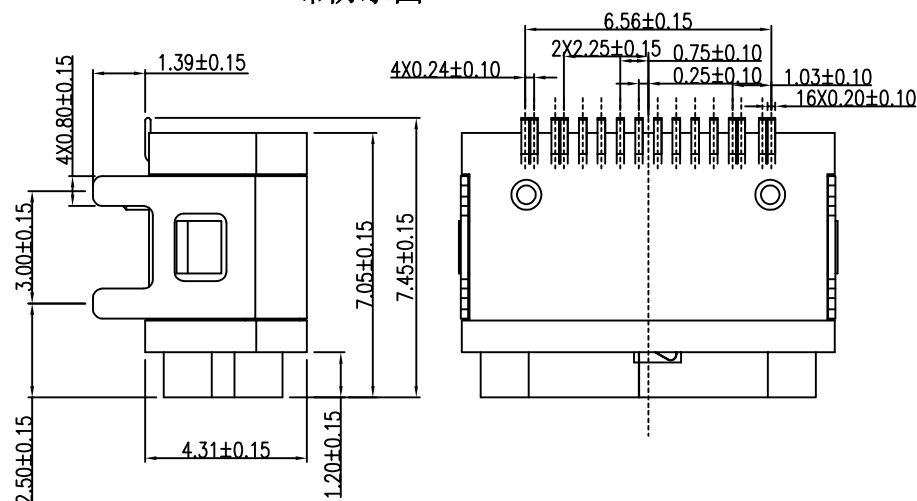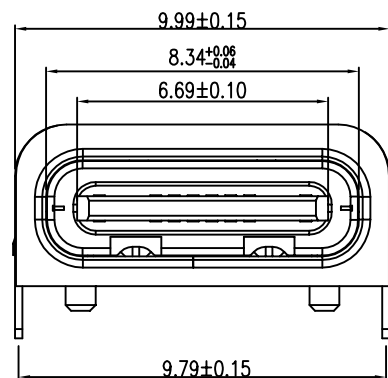

带防水圈示意图

X.	±0.50	X.*	± 2°	UNITS	深圳市鑫南天科技有限公司 Shen zhen Shi Xin Nan Tian Industrial Co., Ltd
.X	±0.30	.X*	± 1°	mm	
.XX	±0.10	.XX*	± 0.5°	MAT'L	TITLE:
.XXX	± 0.05				TYPE-C 16PIN板上四脚插板SMT防水母座 L=7.05MM IPX6级
				FINISH	APPD: JEFF
				Q'TY	CHKD: AG
					DR: COCO
					PART NO.:
					XNT-TYPE-16P-705-DIP
					SCALE SHEET REV.
					1/1 1/1 A1